


# SHIELD GUARD TILE BACKER INSTALLATION



Typically tiles are Cut on a plywood surface with a standard carpentry knife and straight edge. Then passed to the installers on the ladders.


Important to keep gaps minimal between cut tile edge and grid or wall.

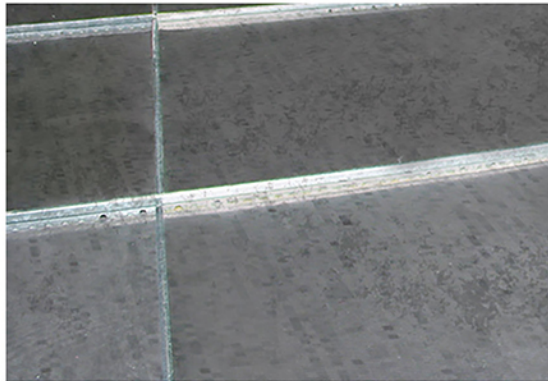

## Composition:

0.12 inch (3.05) non woven polyester acoustic decoupler bonded to to a 0.12 inch (3.05) mass loaded vinyl sound barrier.

Fire Resistance: Class A per ASTM E84 (UL 723-2018)

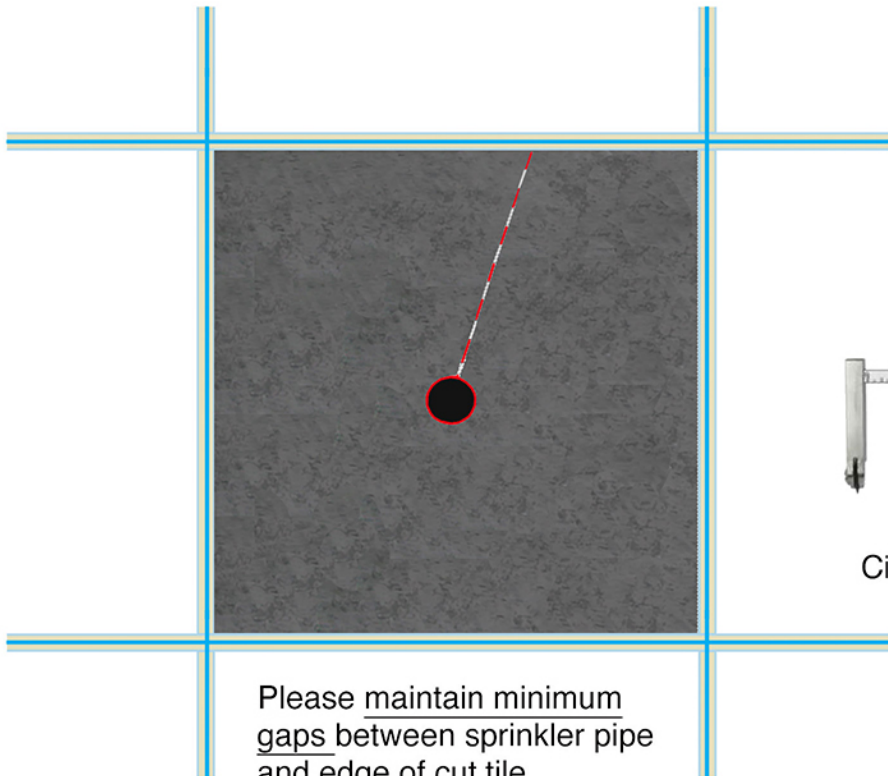

We suggest using a Circle Cutter as a Marker

**Keep Cut Outs and Gaps Tight or Sound Energy will Leak Through.**